


NOTES

1. CLEAR ZONE SHALL NOT CONTAIN BACKFILL GRANULAR MATERIAL LARGER THAN 1/4" IN DIAMETER.
2. TRENCH BED SHALL BE OF A SMOOTH, UNIFORM GRADE, COMPACTED, AND FREE OF STONES OR PROTRUSIONS LARGER THAN 1/4". UNSUITABLE TRENCH BEDS SHALL RECEIVE A 2" COMPACTED LAYER OF "CLEAR ZONE" BACKFILL PRIOR TO CONDUIT PLACEMENT.
3. ELECTRIC DUCT TO BE NEAREST DUCT TO PROPERTY LINE.
4. CONDUIT END CAP COLORS ARE:
RPU-RED
CABLE TV-PINK
NW BELL TELE-BLAZE ORANGE
NATURAL GAS-YELLOW
5. CONDUIT NEEDING SURFACE ACCESS SHALL BE DONE SO BY USING LONG SWEEP BENDS.
- ⑥ A 4"x4" WOODEN POST, EXTENDING ONE FOOT ABOVE GRADE, SHALL BE PLACED BY THE UTILITY CROSSING CONDUITS TO MARK THEIR LOCATION.

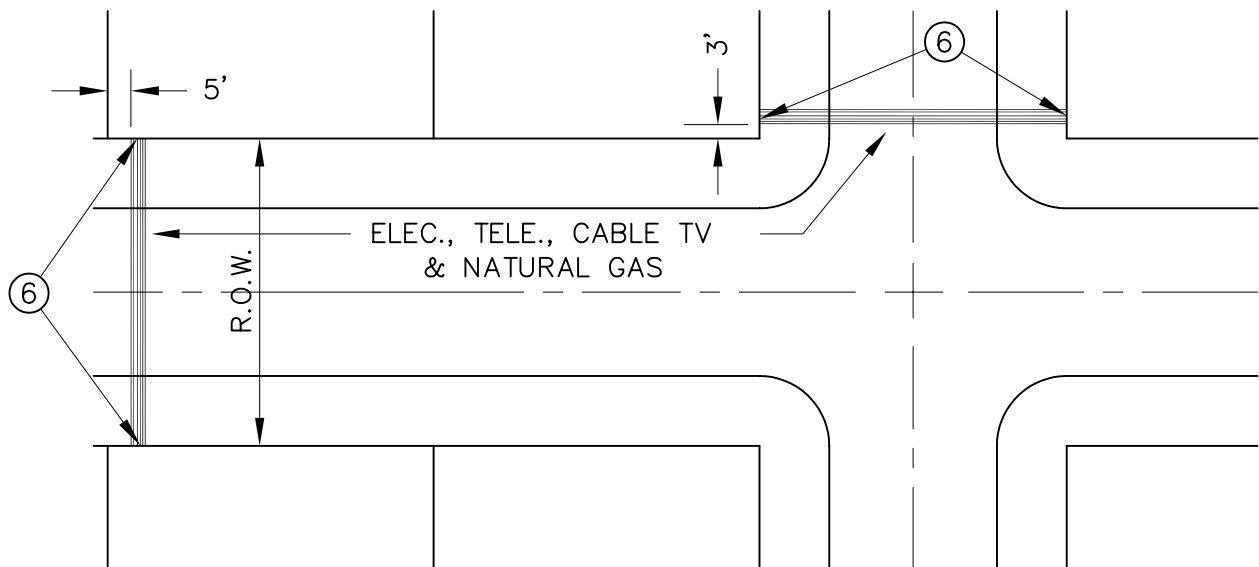

DEPARTMENT OF PUBLIC WORKS CITY OF ROCHESTER, MINNESOTA			
STREET CROSSINGS FOR UTILITY CONDUITS			
<i>Donald L. Nelson</i> ASST. CITY ENGINEER		<i>Keith W. Finner</i> DIRECTOR	
SHT 1 OF 1 SHTS	DATE REVISED 4/1/04	PLATE NO. 4-03	REV. B